



OVERALL DEPTH: 10 ½"
SOUND ASSEMBLY CPT/SD 267-01
STC RATING: 44 / IIC RATING: 21

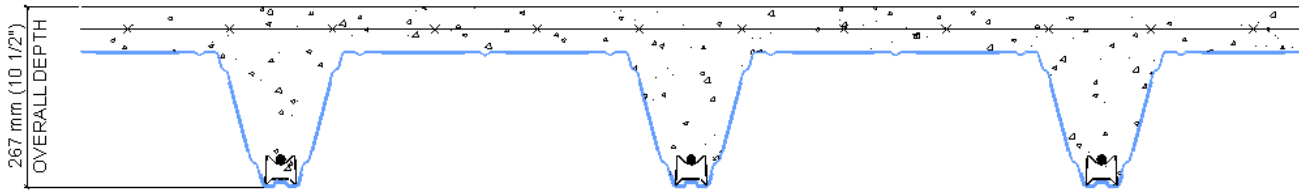


DESIGN NO.	ASSEMBLY	TOP OF SLAB FINISH	CEILING FINISH
CPT/SD 267-01	Concrete topping thickness = 2.5" Deck depth = 8" Overall depth = 10.5"	none	none

OVERALL DEPTH: 10 ½"
SOUND ASSEMBLY CPT/SD 267-02
STC RATING: 51 / IIC RATING: 23

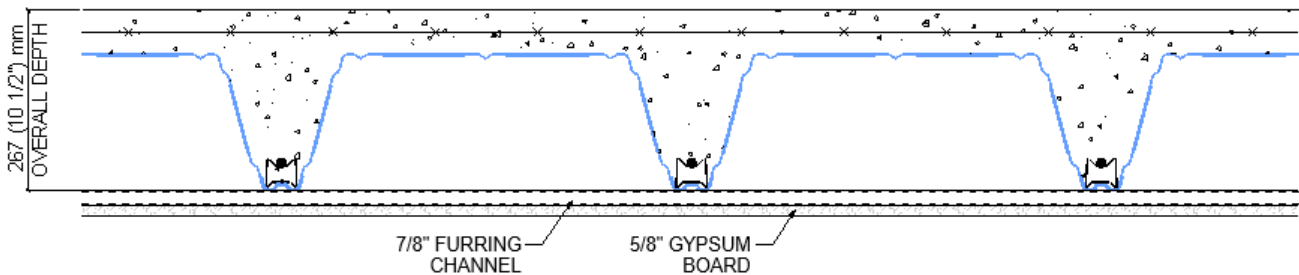


DESIGN NO.	ASSEMBLY	TOP OF SLAB FINISH	CEILING FINISH
CPT/SD 267-02	Concrete topping thickness = 2.5" Deck depth = 8" Overall depth = 10.5"	none	7/8" Furring channel 5/8" Gypsum board

OVERALL DEPTH: 10 1/2"
SOUND ASSEMBLY CPT/SD 267-03
STC RATING: 56 / IIC RATING: 31

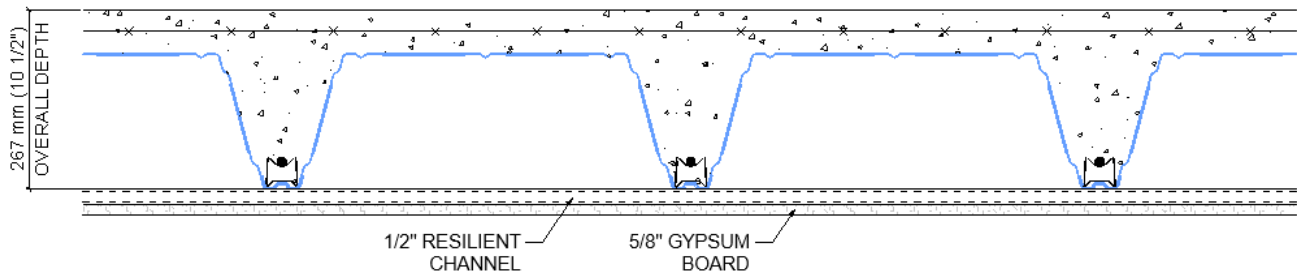


DESIGN NO.	ASSEMBLY	TOP OF SLAB FINISH	CEILING FINISH
CPT/SD 267-03	Concrete topping thickness = 2.5" Deck depth = 8" Overall depth = 10.5"	none	1/2" Resilient channel 5/8" Gypsum board

OVERALL DEPTH: 10 1/2"
SOUND ASSEMBLY CPT/SD 267-04
STC RATING: 55 / IIC RATING: 71

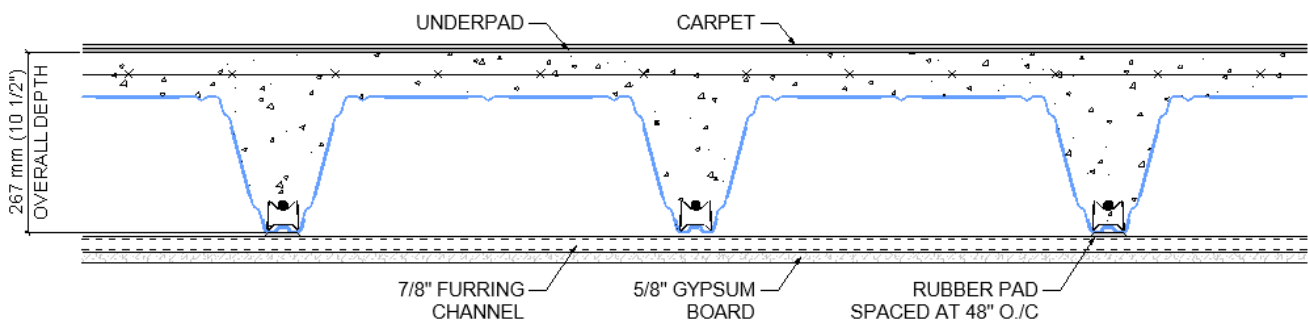


DESIGN NO.	ASSEMBLY	TOP OF SLAB FINISH	CEILING FINISH
CPT/SD 267-04	Concrete topping thickness = 2.5" Deck depth = 8" Overall depth = 10.5"	Carpet Underpad	Rubber pad @ 48" oc. 7/8" Furring channel 5/8" Gypsum board

OVERALL DEPTH: 10 1/2"
SOUND ASSEMBLY CPT/SD 267-05
STC RATING: 55 / IIC RATING: 56

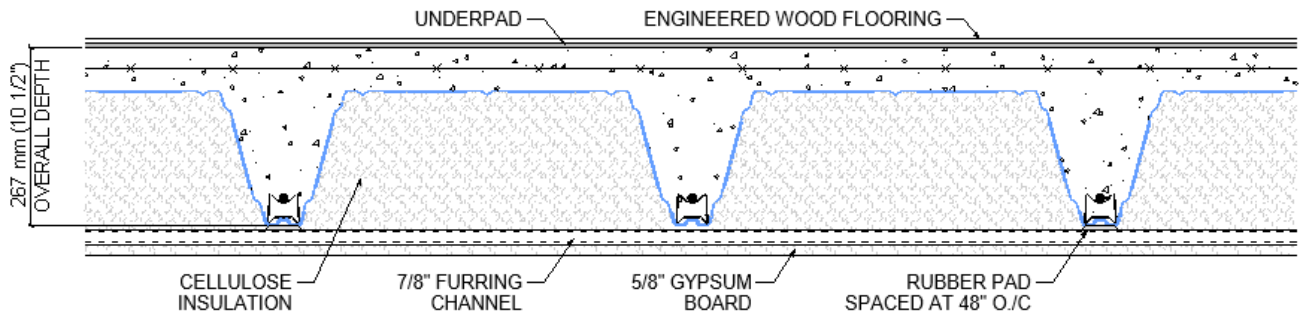

DESIGN NO.	ASSEMBLY	TOP OF SLAB FINISH	CEILING FINISH
CPT/SD 267-05	Concrete topping thickness = 2.5" Deck depth = 8" Overall depth = 10.5"	Engineered wood flooring Underpad	Stone wool insulation Rubber pad @ 48" oc. 7/8" Resilient channel 5/8" Gypsum board

OVERALL DEPTH: 10 1/2"
SOUND ASSEMBLY CPT/SD 267-06
STC RATING: 55 / IIC RATING: 54

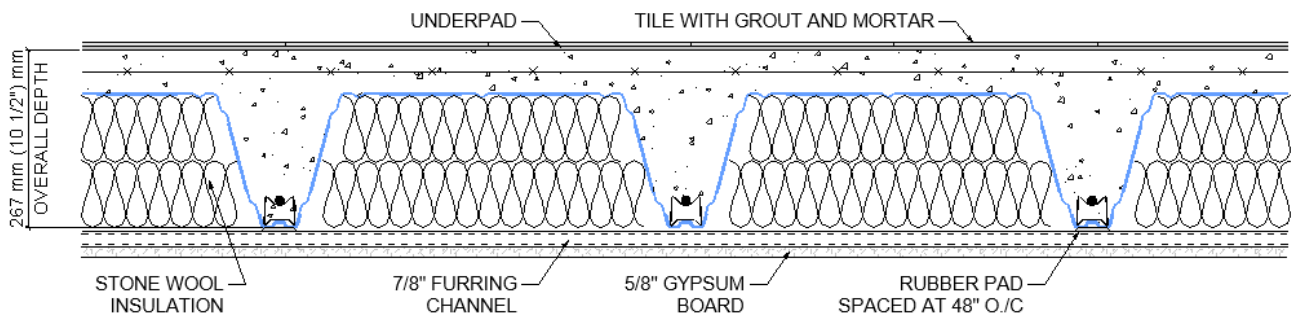

DESIGN NO.	ASSEMBLY	TOP OF SLAB FINISH	CEILING FINISH
CPT/SD 267-06	Concrete topping thickness = 2.5" Deck depth = 8" Overall depth = 10.5"	Tile with grout and mortar Underpad	Stone wool insulation Rubber pad @ 48" oc. 7/8" Furring channel 5/8" Gypsum board