



Intertek Design No.: CPT/SFD 90-01
 ASTM E119 and CAN/ULC-S101
 Fire Resistance Rating: 1 ½ Hour Restrained

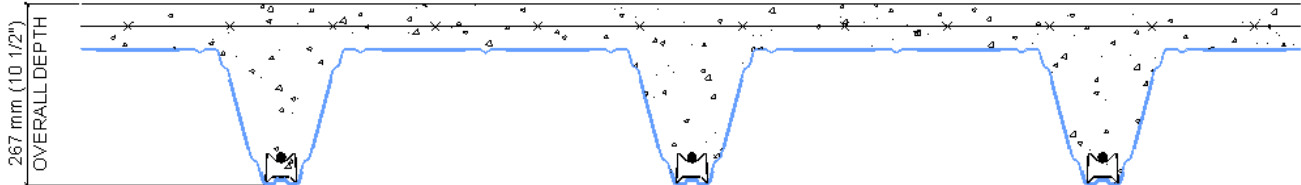

INTERTEK DESIGN NO.	ASSEMBLY	TESTED BY	TESTING STANDARD
CPT/SFD 90-01	Depth Concrete topping thickness = 2.5" Deck depth = 8" Overall depth = 10.5" Finishes Top of slab finish = Bare Underside of slab finish = Bare		ASTM E119 CAN/ULC-S101

Intertek Design No.: CPT/SFD 120-01
 ASTM E119 and CAN/ULC-S101
 Fire Resistance Rating: 2 Hour Restrained

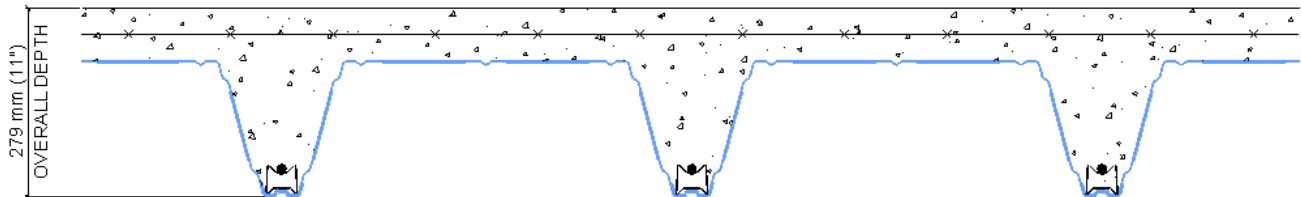

INTERTEK DESIGN NO.	ASSEMBLY	TESTED BY	TESTING STANDARD
CPT/SFD 120-01	Depth Concrete topping thickness = 3" Deck depth = 8" Overall depth = 11" Finishes Top of slab finish = Bare Underside of slab finish = Bare		ASTM E119 CAN/ULC-S101