



**OVERALL DEPTH: 10 ½"**  
**SOUND ASSEMBLY CPT/SD 267-01**  
**STC RATING: 44 / IIC RATING: 21**

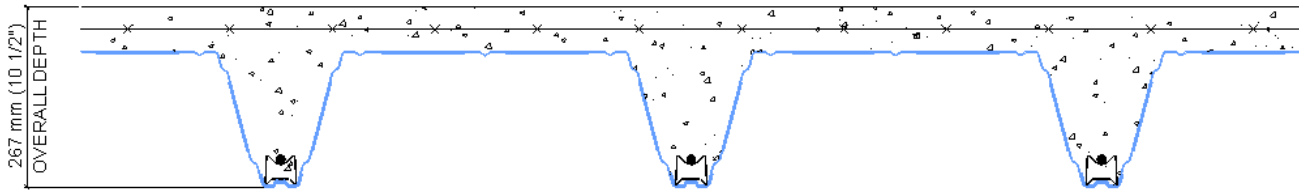


| DESIGN NO.    | ASSEMBLY                                                                      | TOP OF SLAB FINISH | CEILING FINISH |
|---------------|-------------------------------------------------------------------------------|--------------------|----------------|
| CPT/SD 267-01 | Concrete topping thickness = 2.5"<br>Deck depth = 8"<br>Overall depth = 10.5" | none               | none           |

**OVERALL DEPTH: 10 ½"**  
**SOUND ASSEMBLY CPT/SD 267-02**  
**STC RATING: 51 / IIC RATING: 23**

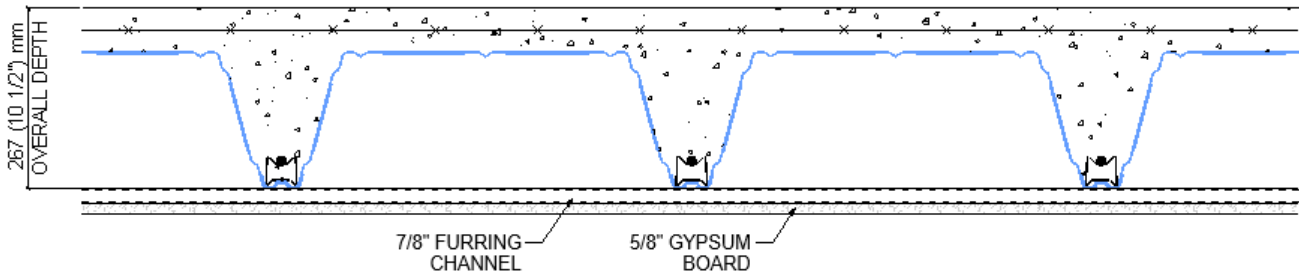


| DESIGN NO.    | ASSEMBLY                                                                      | TOP OF SLAB FINISH | CEILING FINISH                            |
|---------------|-------------------------------------------------------------------------------|--------------------|-------------------------------------------|
| CPT/SD 267-02 | Concrete topping thickness = 2.5"<br>Deck depth = 8"<br>Overall depth = 10.5" | none               | 7/8" Furring channel<br>5/8" Gypsum board |

**OVERALL DEPTH: 10 1/2"**  
**SOUND ASSEMBLY CPT/SD 267-03**  
**STC RATING: 56 / IIC RATING: 31**

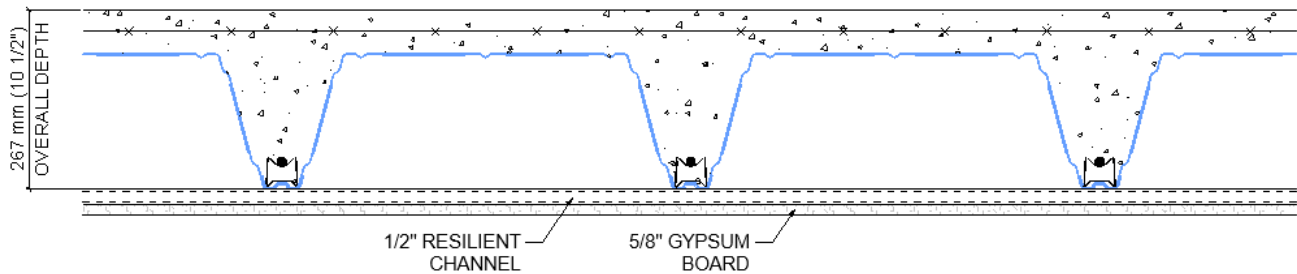


| DESIGN NO.    | ASSEMBLY                                                                      | TOP OF SLAB FINISH | CEILING FINISH                              |
|---------------|-------------------------------------------------------------------------------|--------------------|---------------------------------------------|
| CPT/SD 267-03 | Concrete topping thickness = 2.5"<br>Deck depth = 8"<br>Overall depth = 10.5" | none               | 1/2" Resilient channel<br>5/8" Gypsum board |

**OVERALL DEPTH: 10 1/2"**  
**SOUND ASSEMBLY CPT/SD 267-04**  
**STC RATING: 55 / IIC RATING: 71**

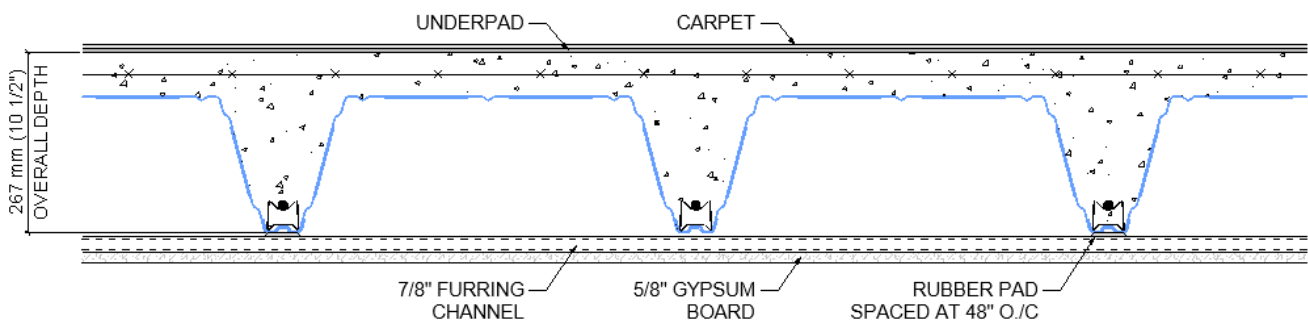


| DESIGN NO.    | ASSEMBLY                                                                      | TOP OF SLAB FINISH | CEILING FINISH                                                    |
|---------------|-------------------------------------------------------------------------------|--------------------|-------------------------------------------------------------------|
| CPT/SD 267-04 | Concrete topping thickness = 2.5"<br>Deck depth = 8"<br>Overall depth = 10.5" | Carpet<br>Underpad | Rubber pad @ 48" oc.<br>7/8" Furring channel<br>5/8" Gypsum board |

**OVERALL DEPTH: 10 1/2"**  
**SOUND ASSEMBLY CPT/SD 267-05**  
**STC RATING: 55 / IIC RATING: 56**

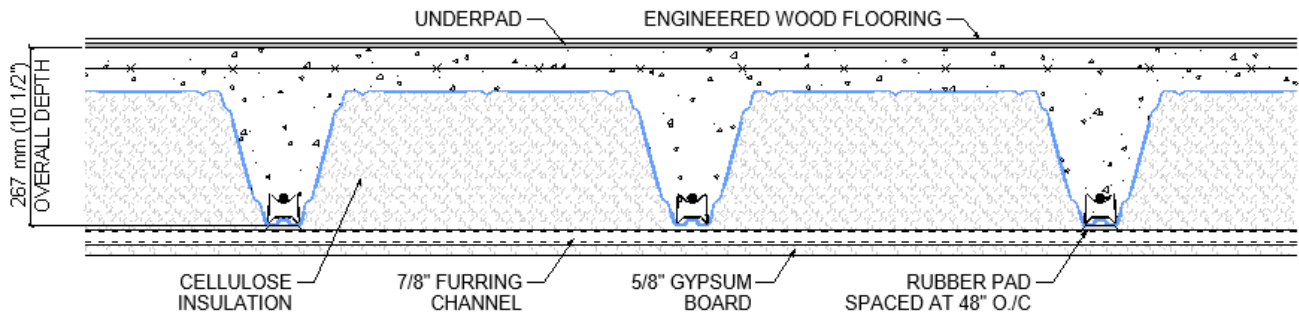

| DESIGN NO.    | ASSEMBLY                                                                      | TOP OF SLAB FINISH                   | CEILING FINISH                                                                               |
|---------------|-------------------------------------------------------------------------------|--------------------------------------|----------------------------------------------------------------------------------------------|
| CPT/SD 267-05 | Concrete topping thickness = 2.5"<br>Deck depth = 8"<br>Overall depth = 10.5" | Engineered wood flooring<br>Underpad | Stone wool insulation<br>Rubber pad @ 48" oc.<br>7/8" Resilient channel<br>5/8" Gypsum board |

**OVERALL DEPTH: 10 1/2"**  
**SOUND ASSEMBLY CPT/SD 267-06**  
**STC RATING: 55 / IIC RATING: 54**

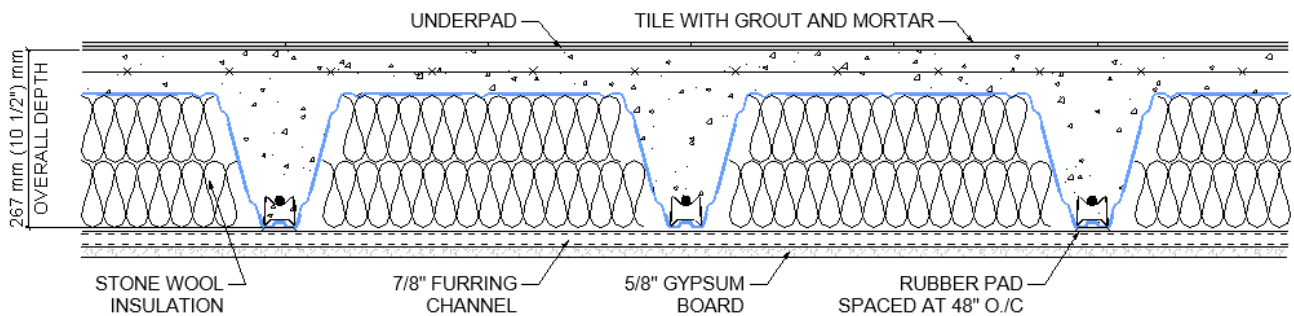

| DESIGN NO.    | ASSEMBLY                                                                      | TOP OF SLAB FINISH                     | CEILING FINISH                                                                             |
|---------------|-------------------------------------------------------------------------------|----------------------------------------|--------------------------------------------------------------------------------------------|
| CPT/SD 267-06 | Concrete topping thickness = 2.5"<br>Deck depth = 8"<br>Overall depth = 10.5" | Tile with grout and mortar<br>Underpad | Stone wool insulation<br>Rubber pad @ 48" oc.<br>7/8" Furring channel<br>5/8" Gypsum board |